

# 360° Indoor/ Outdoor Dome Cameras

3MPx and 6MPx Open Standards



## OVERVIEW

Ideally suited for a variety of applications including retail, commercial, law enforcement and education environments, the TruVision 360° network dome camera provides high-quality image capture that delivers a complete view of indoor or outdoor areas for exceptional security coverage.

Supporting 3MPx and 6MPx sensors, these cameras are PoE 802.3af powered making installation as easy as running a Category 5e cable to the camera location. Particularly effective in areas where overhead shots are necessary such as intersecting corridors, POS registers, counters and warehouses, the 360° camera can also be used in a wall-mount configuration to capture panoramic scenes. With an IR range of up to 10m (33 ft.), they can also be used in low-light environments and for 24/7 exterior surveillance.

The cameras feature multiple viewing modes and ePTZ streams with present and patrol functions, and are easily integrated into Prism and TruVision Navigator VMS or into embedded TruVision NVRs.

## STANDARD FEATURES

- 3MPx and 6MPx image sensor available
- H.264/MJPEG video compression
- 360° view angle
- Multiple viewing modes
- Multiple ePTZ streams with preset and patrol functions
- Up to 10m (33 ft.) IR range
- 2-way audio, built-in mic and speaker
- Built-in SD/SDHC card slot
- Ceiling and wall mount options
- Indoor and outdoor
- Operating temperature range -22°F~-140°F (-30°C~-60°C)

### 3MPx

- 1/3" progressive scan CMOS
- Streaming up to 2048 x 1536
- 120dB WDR


### 6MPx

- 1/1.8" progressive scan CMOS
- Streaming up to 3072 x 2048


## Dimensional Diagrams

### Outdoor Camera

Ø6.57 in.  
Ø167 mm

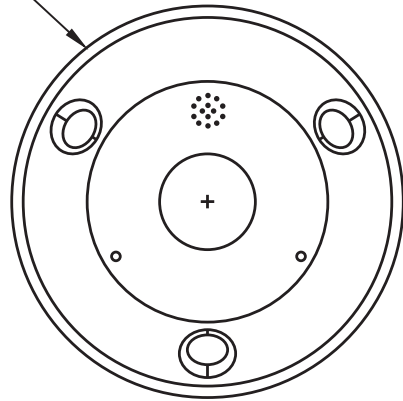


1.77 in.  
(45 mm)




### Indoor Camera

Ø6.57 in.  
Ø167 mm


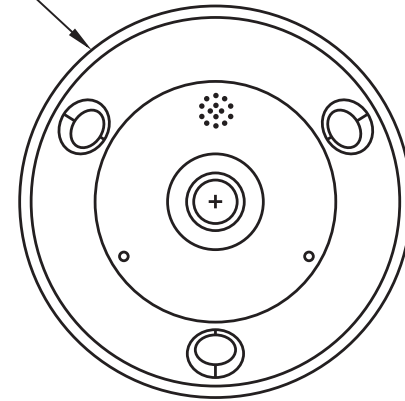


1.77 in.  
(45 mm)




### TVF-BBM

Ø6.59 in.  
Ø167.5 mm

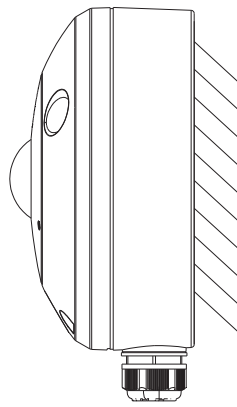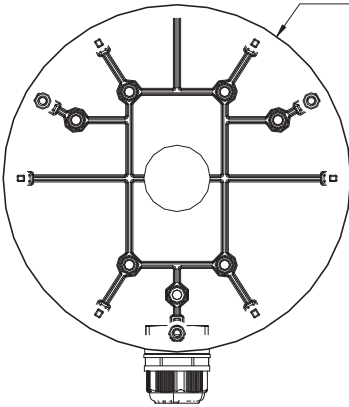



7.57 in.  
(192.3 mm)

1.65 in.  
(42 mm)

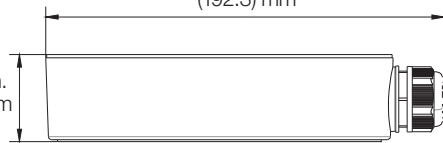


### TVF-WBM

Ø6.59 in.  
Ø167.5 mm


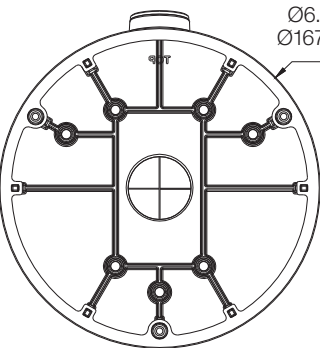


1.92 in.  
(48.7 mm)



### TVF-CBM


Ø7.04 in.  
Ø178.7 mm

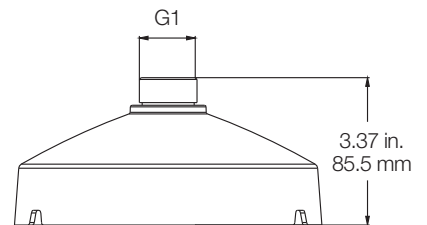


G1

3.37 in.  
85.5 mm

## TVD-SNB

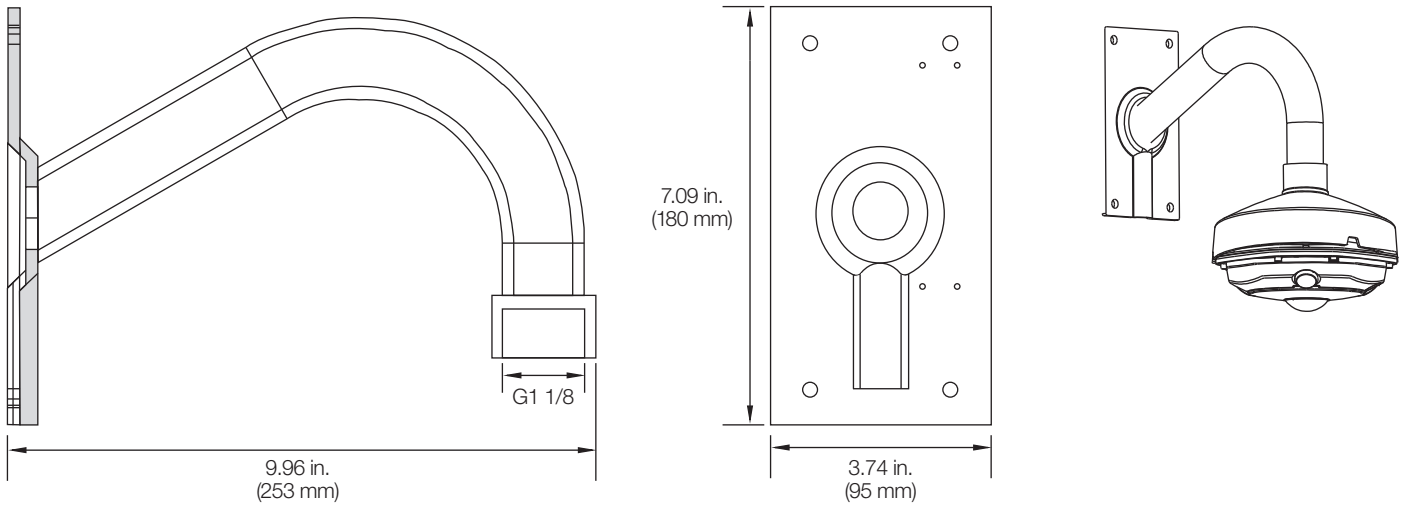

## TVD-PPB

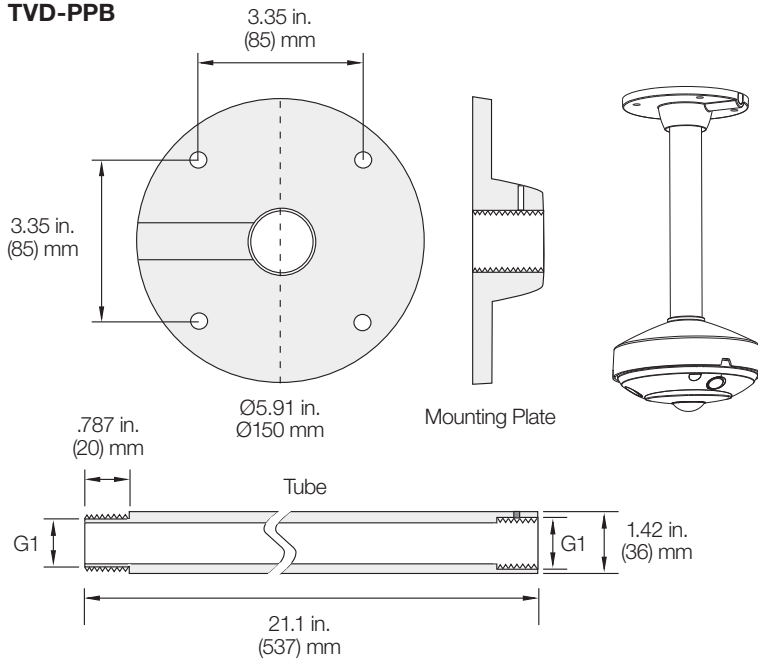

## Bracket Specifications

SKU	Dimensions	Weight
<b>TVD-SNB</b>	9.96 x 3.74 x 7.09 in. (253 x 95 x 180 mm)	1.1 lbs. (490g)
<b>TVD-PPB</b>	Ø 5.91 x 21.14 in. (Ø 150 x 537 mm)	2.58 lbs. (1169g)
<b>TVF-BBM</b>	Ø 6.59 x 1.65 in. (Ø 167.5 x 42 mm)	.75 lbs. (337.5g)
<b>TVF-WBM</b>	Ø 6.59 x 1.92 in. (Ø 167.5 x 48.7 mm)	.67 lbs. (304.5g)
<b>TVF-CBM</b>	Ø 7.04 x 3.37 in. (Ø 178.7 x 85.5 mm)	1.2 lbs. (542g)

## Pipe Threading Information

Pipe thread size	Threads (in.)	Pitch (mm)	Thread major diameter		Corresponding pipe				Tapping drill size (mm)
			(mm)	(in.)	DN	OD (mm)	OD (in.)	Thickness (mm)	BSP.F (g)
G1	11	2.309	33.249	1.309	25	33.7	1.33	3.2	30.75

The hole of back box and wedge box is G 3/4

# 360° Indoor/Outdoor Dome Cameras

Interlogix  
National Sales Enquiries  
1300 361 479

Ground Floor  
10 Ferntree Place  
Notting Hill, Vic 3168  
T +61 3 9239 1200  
F +61 3 9239 1298

## Specifications

SKU	TVF-1102	TVF-1104
<b>Description</b>	3MPx, Outdoor	6MPx, Outdoor
<b>Sensor</b>	1/3" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS
<b>Lens</b>	1.19mm @ f2.0	1.27mm @ f2.8
<b>Minimum Illumination</b>	0.1 lux @ f1.2, AGC ON 0.28 @ f2.0 AGC ON, 0 lux with IR	0.05 lux @ f1.2, AGC ON 0.3 lux @ f2.8 AGC ON, 0 lux with IR
<b>Day/Night</b>	ICR, True D/N	
<b>Shutter Speed</b>	50 Hz: 1/25s ~ 1/100,000s 60 Hz: 1/30s ~ 1/100,000s	
<b>Max. Image Resolution</b>	2048 x 1536	3072 x 2048
<b>Image</b>	High-frame mode supports: 50Hz: 1 x fisheye (2048 x 1536, 25fps) or (1536 x 1536, 25fps) or 4 x PTZ (800 x 600, 25fps) 60Hz: 1 x fisheye (2048 x 1536, 25fps) or (1536 x 1536, 30fps) or 4 x PTZ (800 x 600, 30fps) Multi-channel mode supports: 50Hz: 1 x fisheye (1536 x 1536, 20fps) and 1 x panoramic (1600 x 1200, 20fps) and 3 x PTZ (800 x 600, 20fps) 60Hz: 1 x fisheye (1536 x 1536, 20fps) and 1 x panoramic (1600 x 1200, 20fps) and 3 x PTZ (800 x 600, 20fps)	High-frame mode supports: 50Hz: 1 x fisheye (3072 x 2048, 25fps) or (2048 x 2048, 25fps) or 4 x PTZ (1024 x 768, 25fps) 60Hz: 1 x fisheye (3072 x 2048, 25fps) or (2048 x 2048, 30fps) or 4 x PTZ (1024 x 768, 30fps) Multi-channel mode supports: 50Hz: 1 x fisheye (1280 x 1280, 12.5fps) and 1 x panoramic (2048 x 1536, 12.5fps) and 3 x PTZ (1024 x 768, 12.5fps) 60Hz: 1 x fisheye (1280 x 1280, 15fps) and 1 x panoramic (2048 x 1536, 15fps) and 3 x PTZ (1024 x 768, 15fps)
<b>IR Range</b>	10m (33 ft.) Configurable IR on/off	
<b>Video Compression</b>	Video compression H.264 / MJPEG Multiple streams: surrounding, Panoramic, 4 x PTZ	
<b>Bit Rate</b>	128Kbps~16Mbps	
<b>Wide Dynamic Range</b>	120dB WDR	DWDR
<b>Digital Noise Reduction</b>	3D-NR	
<b>Image Settings</b>	Saturation, brightness, contrast, sharpness adjustable through client software or Web browser	
<b>Features</b>	Network storage NAS, Alarm trigger motion detection, tampering alarm, storage exception Protocols: TCP/IP, HTTP, DHCP, DNS, DDNS, ezDDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos, IPv6 Interoperability Onvif, PSIA, CGI Security User Authentication, reset button, watermark, Multicast	
<b>Interface</b>	Communication interface 1 RJ45 10 M / 100 M Ethernet interface, DC Power interface, RS485 interface	
<b>Power Source</b>	PoE (802.3 af) /12VDC ± 10%	
<b>Operating Temperature</b>	-22°F~-140°F (-30°C~60°C)	
<b>Environmental Rating</b>	IP66	
<b>Audio</b>	Bi-directional , built-in speaker and mic	
<b>Impact Rating</b>	IK10	
<b>Storage</b>	Built-in SD/SDHC card slot	
<b>Regulatory Compliance</b>	C-tick, FCC, CE, UL, WEEE, RoHS, REACH	

## Ordering Information

<b>TVF-1102</b>	TruVision 360° Dome, 3MPx, WDR, 1.19mm Fisheye Lens, True D/N, 10m IR, 2-Way Audio (built-in mic & speaker), SD/SHDC Slot, POE (802.3af) /12VDC, IP66, IK10
<b>TVF-1104</b>	TruVision 360° Dome, 6MPx, DWDR, 1.27mm Fisheye Lens, True D/N, 10m IR, 2-Way Audio (built-in mic & speaker), SD/SHDC Slot, POE (802.3af) /12VDC, IP66, IK10

## Accessories

<b>TVF-BBM</b>	TruVision 360° Dome Round Back Box, Conduit Ports, Gang Box Compatible, Metal, Indoor/Outdoor
<b>TVF-WBM</b>	TruVision 360° Dome Round Angled Back Box, Conduit Ports, Gang Box Compatible, Metal, Indoor/Outdoor
<b>TVF-CBM</b>	TruVision 360° Dome Cup Base (Use w/TVD-PPB for Pendant Mount or TVD-SNB for Wall Mount)

Specifications subject to change without notice.

Copyright © 2014 UTC Fire & Security Australia Pty Ltd.  
All rights reserved.

UTC Fire & Security Australia Pty Ltd trading as Interlogix is a UTC Building & Industrial Systems company.



DOMECAM-DS-141202-1